

QUINN LITE

Description


Eaves – Unventilated/Ventilated –
Insulation between and under rafters –
Dormer

Identifier

1.11.2 & 1.12.2

NSAI modeller no.

TM/02

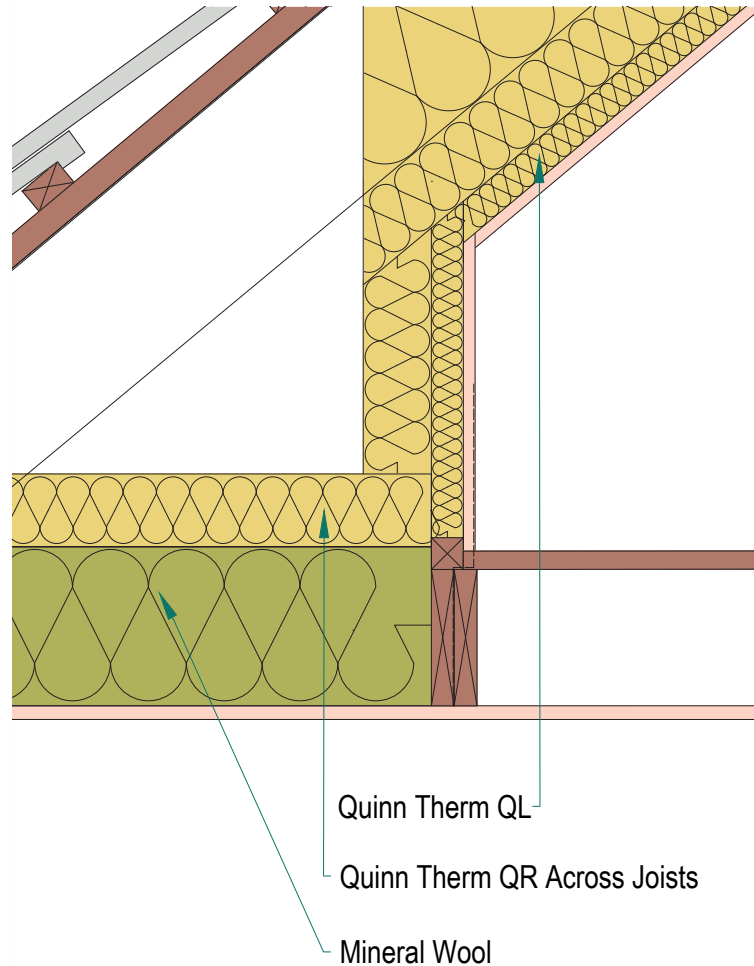

| | A | | B | | C | | D | |
|-----------------|--|---------------------------|--|---------------------------|--|---------------------------|--|---------------------------|
| | Wall U-value 0.21W/m ² K (partial fill insulation only) Roof = 0.16, Floor = 0.21 | | Wall U-value 0.15W/m ² K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15 | | Wall U-value 0.15W/m ² K (partial fill insulation only) Roof = 0.14, Floor = 0.15 | | Wall U-value 0.12W/m ² K (partial fill insulation with internal insulation) Roof = 0.12, Floor = 0.12 | |
| Inner leaf type | Ψ-value (W/mK) | Temperature factor (fRsi) | Ψ-value (W/mK) | Temperature factor (fRsi) | Ψ-value (W/mK) | Temperature factor (fRsi) | Ψ-value (W/mK) | Temperature factor (fRsi) |
| | 0.017 | 0.92 | 0.014 | 0.91 | 0.014 | 0.91 | 0.012 | 0.93 |



Andrew Lundberg
Passivate
Registration Number IAB/TM/02
NSAI Approved Thermal Modeller