

## Description


Ground Floor - Insulation above slab

### Identifier

1.01

### NSAI modeller no.

TM/02

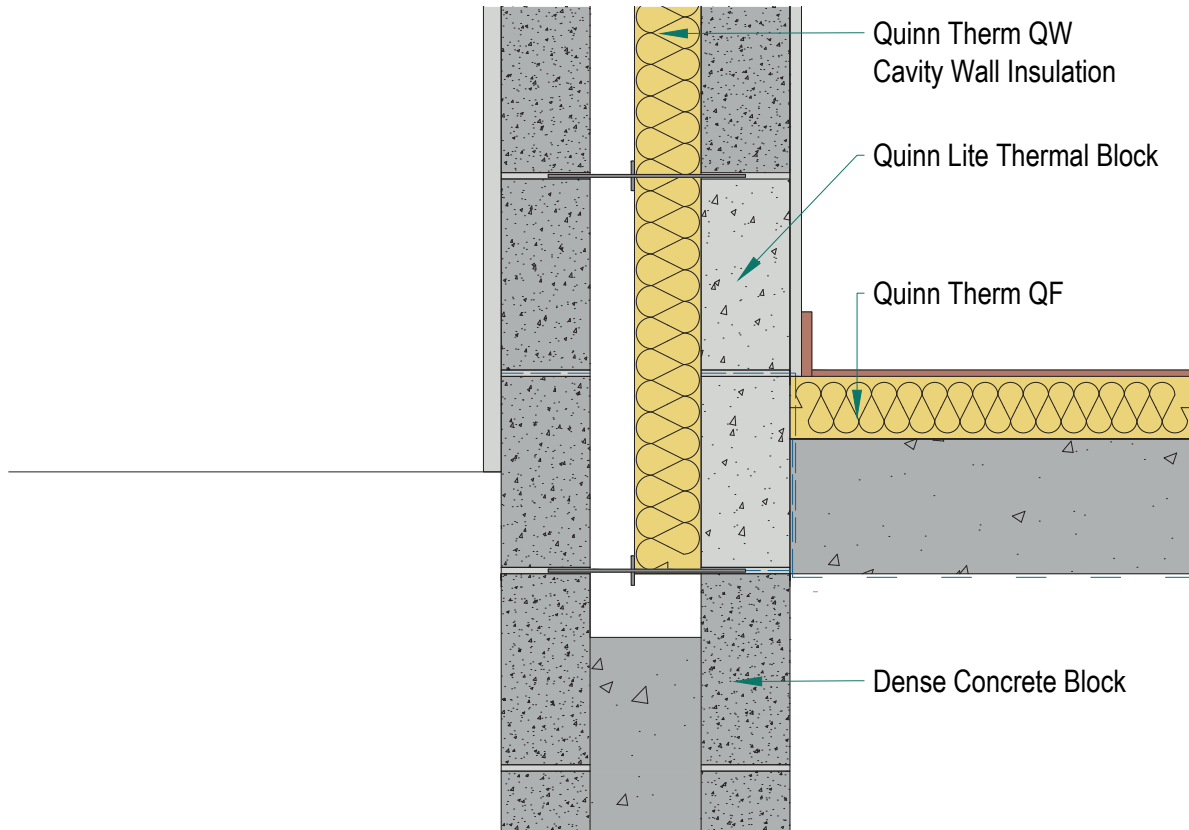

	A		B		C		D	
	Wall U-value 0.21W/m <sup>2</sup> K (partial fill insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m <sup>2</sup> K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15		Wall U-value 0.15W/m <sup>2</sup> K (partial fill insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m <sup>2</sup> K (partial fill insulation with internal insulation) Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.051	0.85	0.025	0.91	0.046	0.88	0.027	0.93
B5	0.063	0.83	0.029	0.91	0.059	0.87	0.029	0.92
B7	0.0677	0.83	0.031	0.91	0.064	0.87	0.03	0.92

### Notes



Andrew Lundberg  
Passivate  
Registration Number IAB/TM/02  
NSAI Approved Thermal Modeller