

QUINN LITE

Description


Open - Concrete Forward Sill

Identifier

1.26

NSAI modeller no.

TM/02

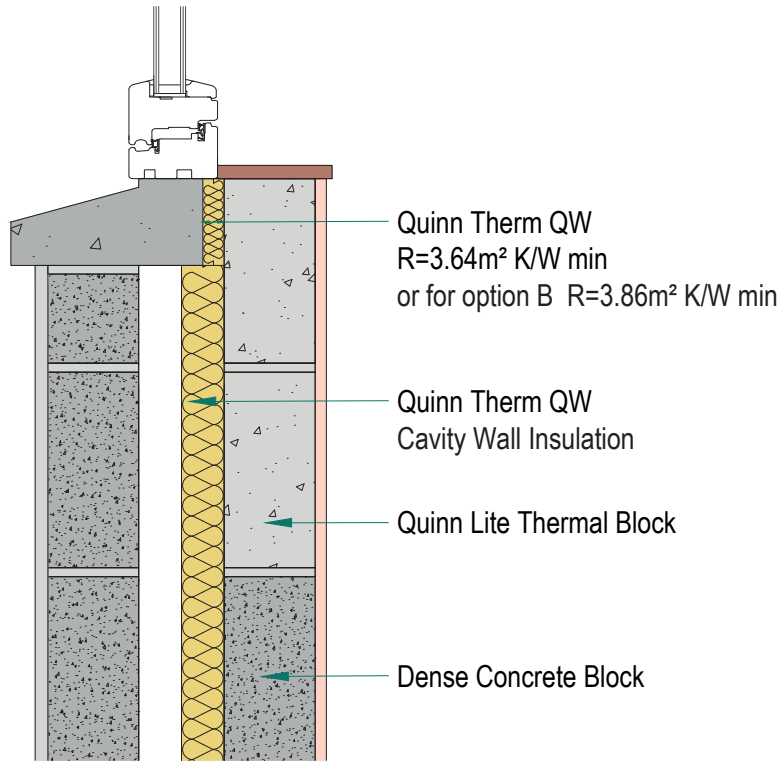

	A		B		C		D	
	Wall U-value 0.21W/m ² K (partial fill insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m ² K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15		Wall U-value 0.15W/m ² K (partial fill insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m ² K (partial fill insulation with internal insulation) Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	-0.007	0.94	0.006	0.93	0.005	0.87	0.006	0.92
B5	-0.005	0.94	0.008	0.75	0.007	0.87	0.007	0.92
B7	-0.004	0.94	0.009	0.75	0.008	0.87	0.008	0.91

Notes

Cavity Closer with minimum R-value of 3.64 m²K/W.

NSAI
Agrément

Andrew Lundberg
Passivate

Registration Number IAB/TM/02
NSAI Approved Thermal Modeller