

QUINN LITE

Description


Open - Jamb with closer block

Identifier

1.24

NSAI modeller no.

TM/02

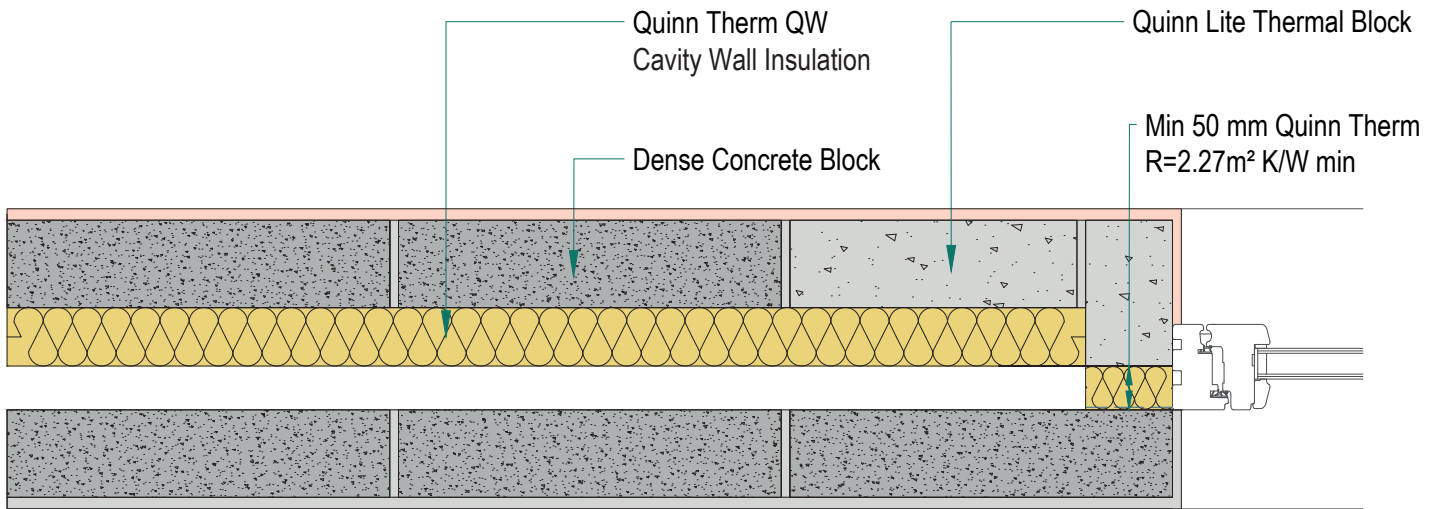

	A		B		C		D	
	Wall U-value 0.21W/m ² K (partial fill insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m ² K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15		Wall U-value 0.15W/m ² K (partial fill insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m ² K (partial fill insulation with internal insulation) Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.001	0.91	0.001	0.96	0.013	0.90	0.009	0.95
B5	0.006	0.91	0.005	0.96	0.018	0.90	0.012	0.95
B7	0.008	0.91	0.006	0.95	0.020	0.90	0.013	0.95

Notes

Cavity Closer to have minimum R-value of 2.27 m²K/W.

NSAI
Agrément

Andrew Lundberg
Passivate
Registration Number IAB/TM/02
NSAI Approved Thermal Modeller