

QUINN LITE

Description


Open - Jamb with proprietary cavity closer

Identifier

1.25

NSAI modeller no.

TM/02

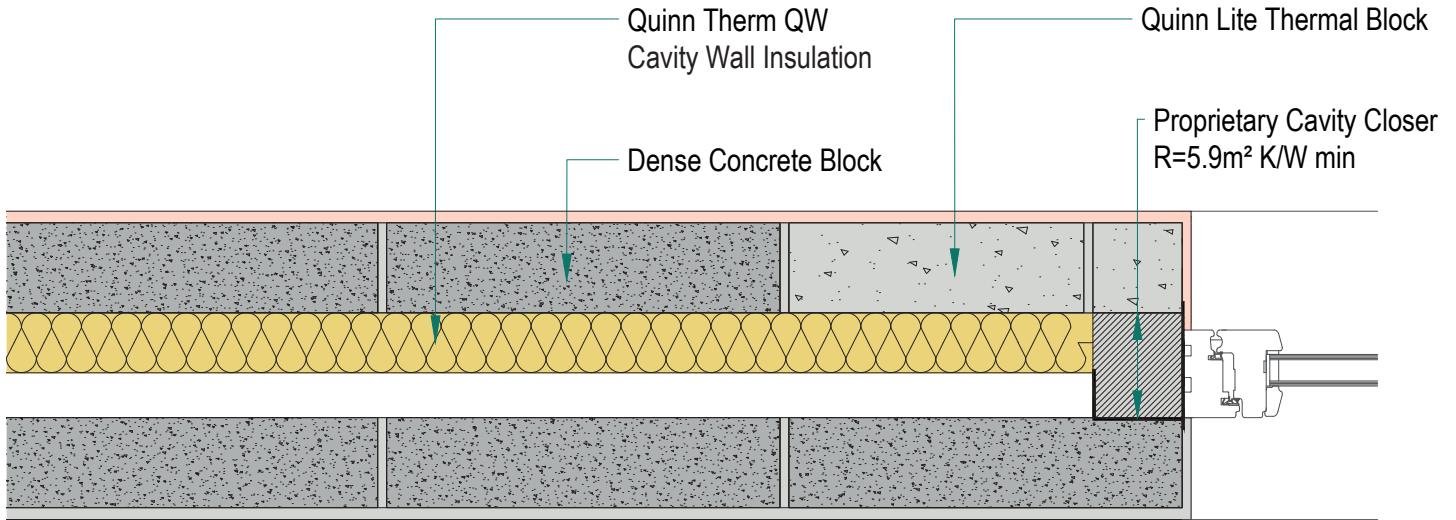

	A		B		C		D	
	Wall U-value 0.21W/m ² K (partial fill insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m ² K (partial fill insulation with internal insulation) Roof = 0.14, Floor = 0.15		Wall U-value 0.15W/m ² K (partial fill insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m ² K (partial fill insulation with internal insulation) Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	-0.149	0.94	-0.009	0.96	-0.005	0.95	-0.001	0.75
B5	-0.012	0.94	-0.007	0.96	-0.004	0.95	-0.001	0.96
B7	-0.011	0.94	-0.007	0.96	-0.003	0.95	-0.001	0.96



Andrew Lundberg
 Passivate
 Registration Number IAB/TM/02
 NSAI Approved Thermal Modeller