

# QUINN LITE

## Description


Eaves – Unventilated/Ventilated -  
Insulation between and under rafters –  
Dormer

## Identifier

2.08  
2.09  
2.10.1  
2.11.1

## NSAI modeller no.

TM/02

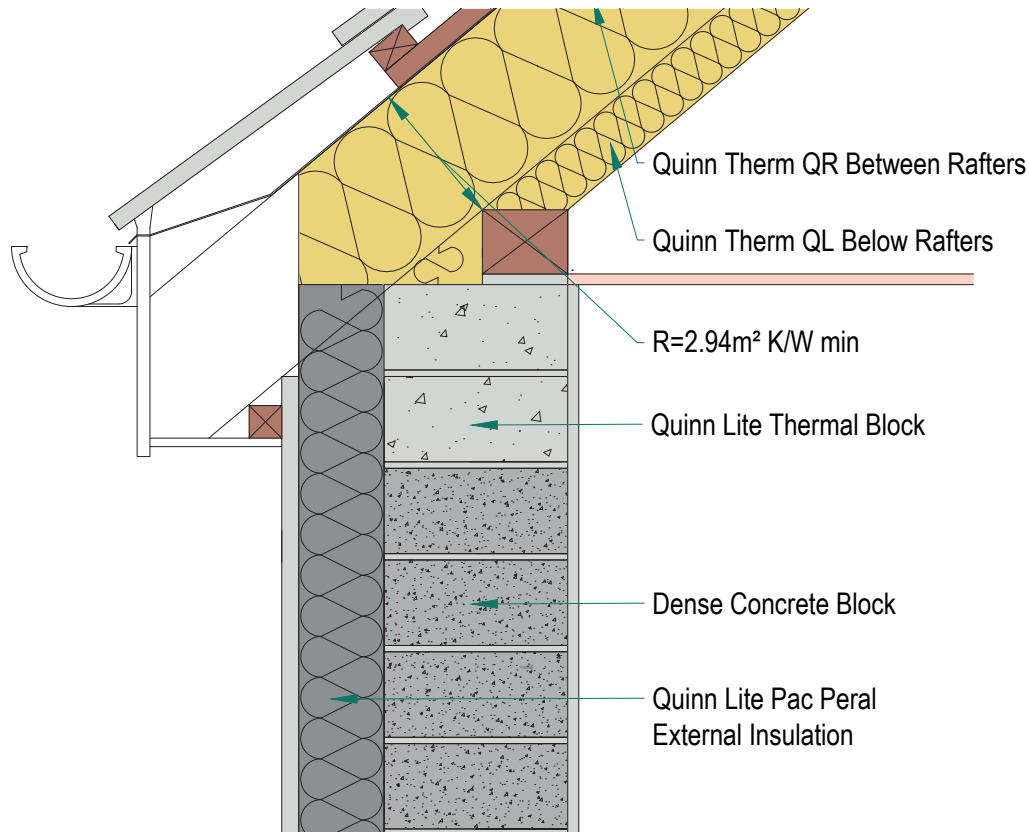

	A		B		C	
	Wall U-value 0.21W/m <sup>2</sup> K Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m <sup>2</sup> K Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m <sup>2</sup> K Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.029	0.91	0.041	0.92	0.058	0.92
B5	0.032	0.92	0.043	0.92	0.061	0.92
B7	0.033	0.92	0.043	0.92	0.062	0.92

## Notes

Eaves corner insulation between wall plate and ventilated space has a min. R-value of 2.94 m<sup>2</sup>K/W.



Andrew Lundberg  
Passivate  
Registration Number IAB/TM/02  
NSAI Approved Thermal Modeller