

# QUINN LITE

## Description


Eaves - Unventilated - Insulation between and over rafters

### Identifier

2.13

### NSAI modeller no.

TM/02

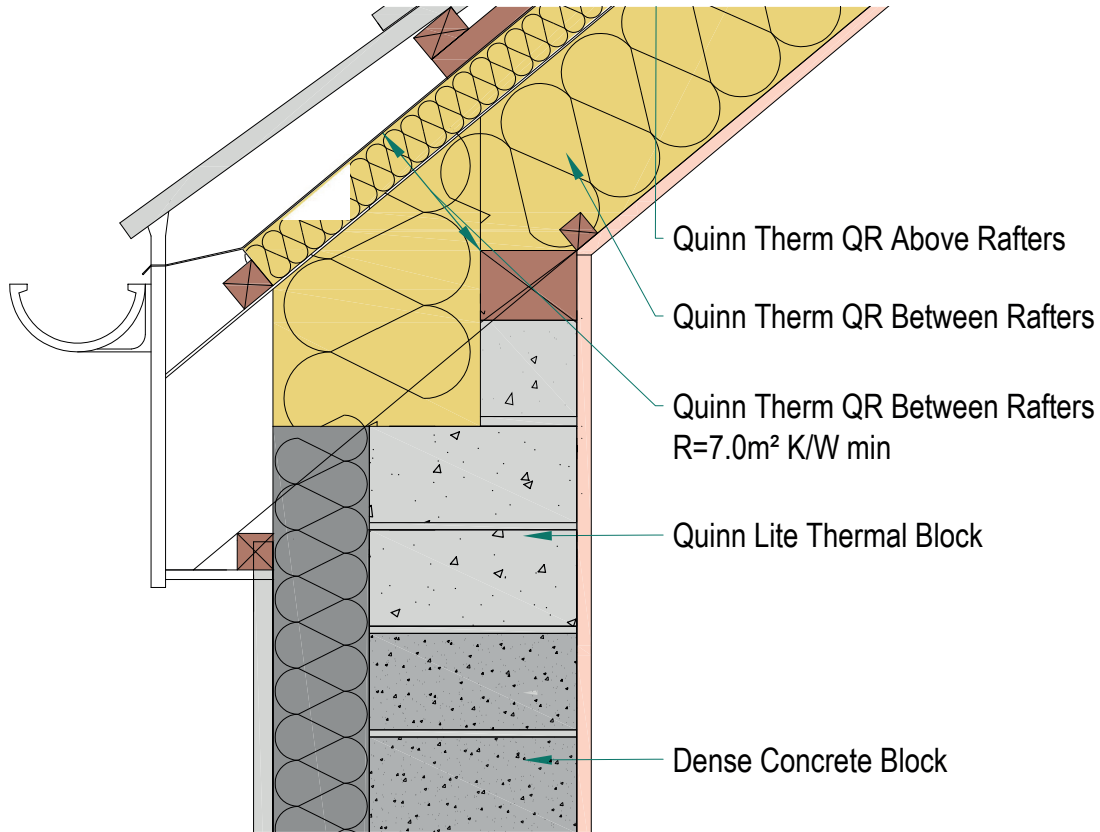

	A		B		C	
	Wall U-value 0.21W/m2K Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m2K Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m2K Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.003	0.91	0.020	0.92	0.018	0.93
B5	0.004	0.91	0.021	0.92	0.019	0.93
B7	0.052	0.91	0.022	0.92	0.019	0.93

## Notes

Minimum R value across insulation thickness at eaves near wallplate 7.0 m2K/W. Two courses of Quinnlite Blocks under wallplate

**NSAI**  
Agrément

Andrew Lundberg  
Passivate  
Registration Number IAB/TM/02  
NSAI Approved Thermal Modeller