

## Description


Flat Roof - Parapet

### Identifier

2.19

### NSAI modeller no.

TM/02

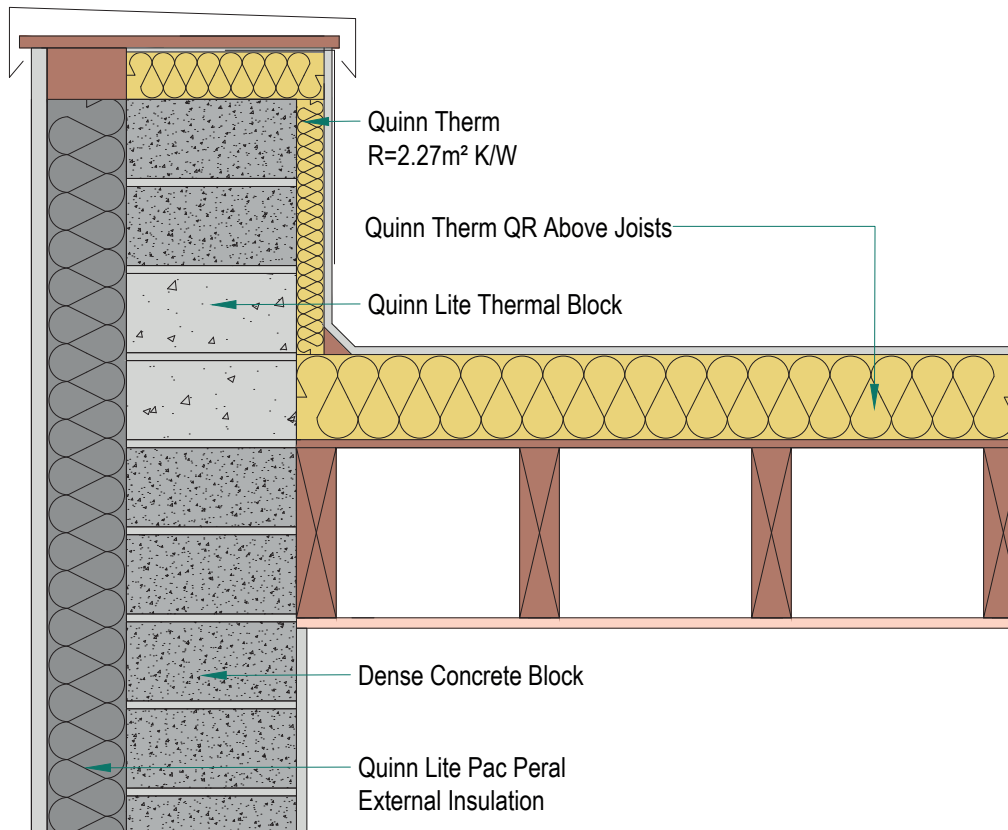

	A		B		C	
	Wall U-value 0.21W/m2K Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m2K Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m2K Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.131	0.89	0.116	0.90	0.108	0.91
B5	0.146	0.88	0.131	0.90	0.122	0.91
B7	0.151	0.88	0.136	0.89	0.127	0.90

## Notes

Insulation upstand to have minimum R-value of 2.27 m2K/W. 300mm minimum between top of insulation upstand and bottom of horizontal roof insulation.

**NSAI**  
Agrément

Andrew Lundberg  
Passivate  
Registration Number IAB/TM/02  
NSAI Approved Thermal Modeller