

# QUINN LITE

## Description


Sill

### Identifier

2.22

### NSAI modeller no.

TM/02

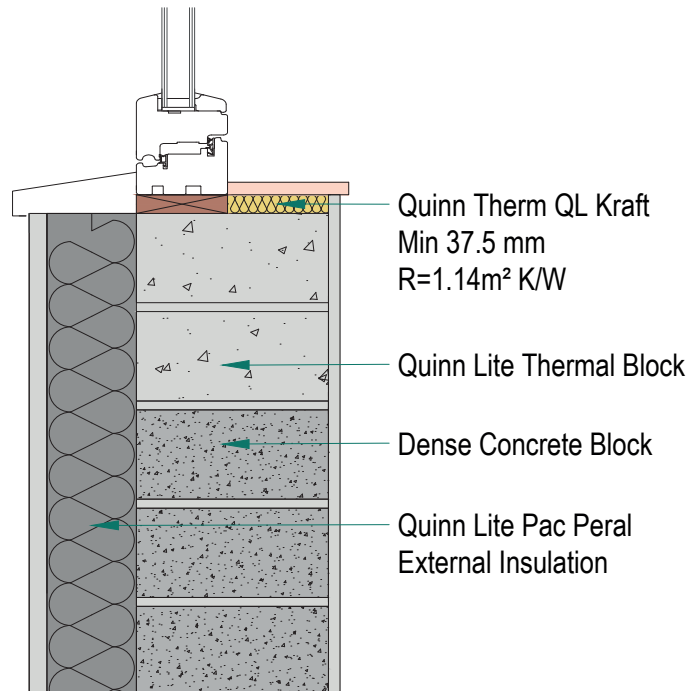

	A		B		C	
	Wall U-value 0.21W/m <sup>2</sup> K Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m <sup>2</sup> K Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m <sup>2</sup> K Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.002	0.94	0.012	0.95	0.018	0.96
B5	0.006	0.94	0.016	0.95	0.022	0.96
B7	0.007	0.94	0.017	0.95	0.023	0.96

## Notes

Insulation to cover window cill externally and internally by min 15mm



Andrew Lundberg  
Passivate  
Registration Number IAB/TM/02  
NSAI Approved Thermal Modeller