

## Description


Timber Suspended Ground Floor

### Identifier

6.03

### NSAI modeller no.

TM/02

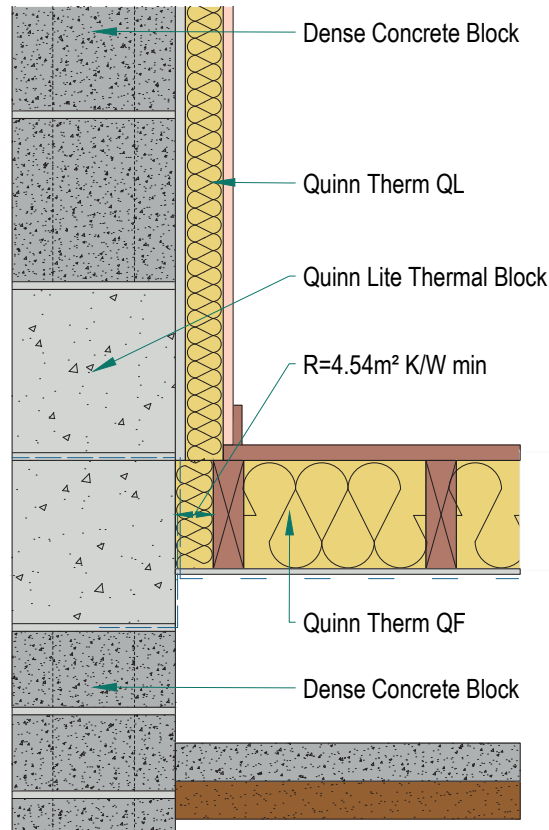

	A		B		C	
	Wall U-value 0.21W/m2K (internal insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m2K (internal insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m2K (internal insulation only) Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.021	0.87	0.006	0.90	0.010	0.91
B5	0.020	0.87	0.007	0.90	0.007	0.91
B7	0.021	0.87	0.008	0.90	0.007	0.91

## Notes

Perimeter insulation to have thermal resistance of minimum 1.14m2K/W.



NSAI  
Agrément

Andrew Lundberg  
Passivate

Registration Number IAB/TM/02  
NSAI Approved Thermal Modeller