

Description


Timber Suspended Ground Floor

Identifier

3.03

NSAI modeller no.

TM/02

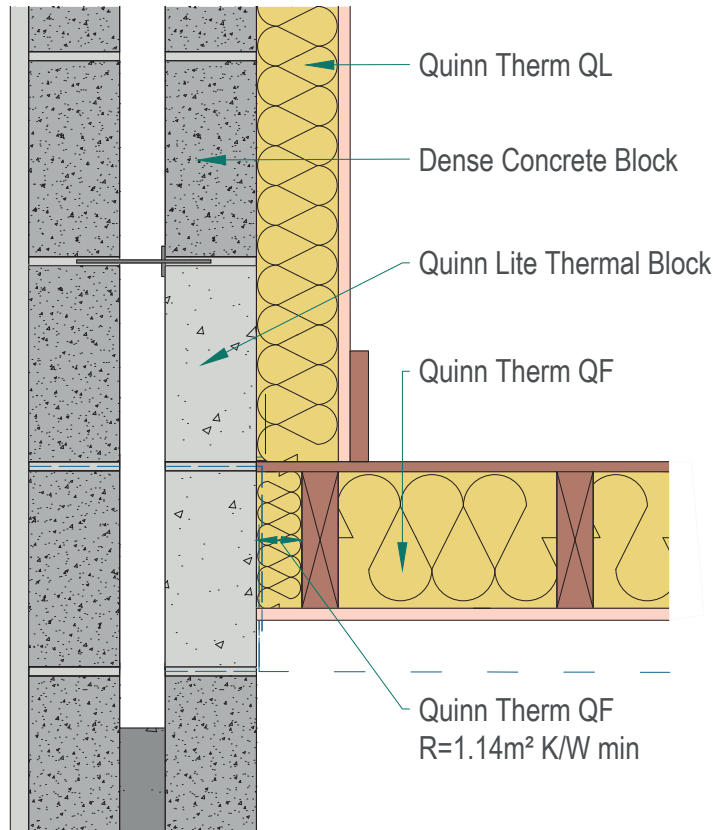

	A		B		C	
	Wall U-value 0.21W/m2K (internal insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m2K (internal insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m2K Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.031	0.87	0.020	0.90	0.007	0.91
B5	0.033	0.87	0.021	0.90	0.005	0.91
B7	0.033	0.87	0.021	0.90	0.005	0.91

Notes

Perimeter insulation to have thermal resistance of minimum 1.14m2K/W.



NSAI
Agrément

Andrew Lundberg
Passivate

Registration Number IAB/TM/02
NSAI Approved Thermal Modeller