

QUINN LITE

Description


Ope - Jamb with proprietary cavity closer

Identifier

3.23

NSAI modeller no.

TM/02

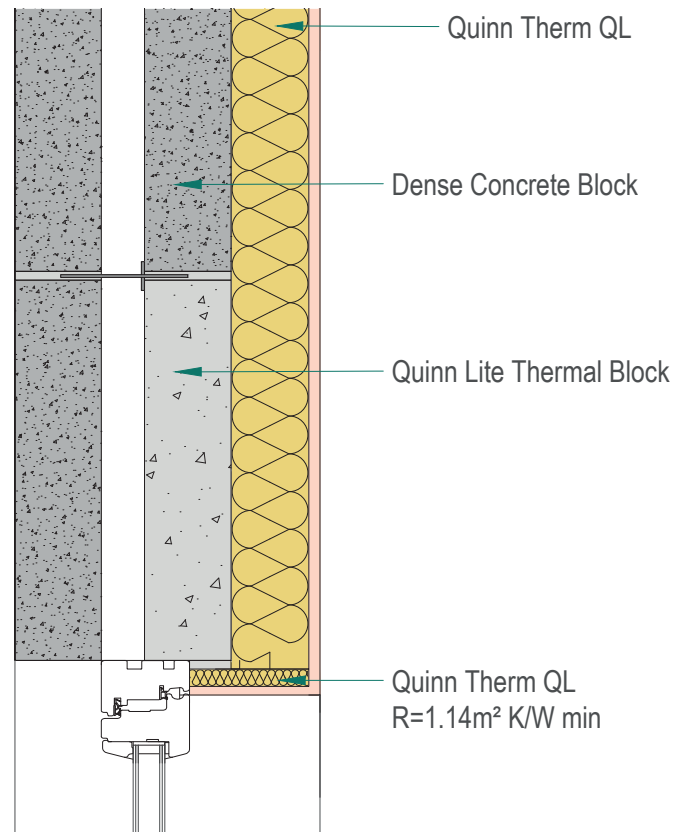

	A		B		C	
	Wall U-value 0.21W/m2K (internal insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m2K (internal insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m2K Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.085	0.92	0.017	0.91	0.026	0.91
B5	0.092	0.91	0.022	0.90	0.029	0.90
B7	0.094	0.90	0.024	0.90	0.030	0.90

Notes

Insulation at cavity closer to have a minimum R-value of 0.27 m2K/W.
Insulation at jamb to have a minimum R-value of 1.14 m2K/W



Andrew Lundberg
Passivate
Registration Number IAB/TM/02
NSAI Approved Thermal Modeller