

QUINN LITE

Description


Open - Concrete Forward Sill

Identifier

3.24

NSAI modeller no.

TM/02

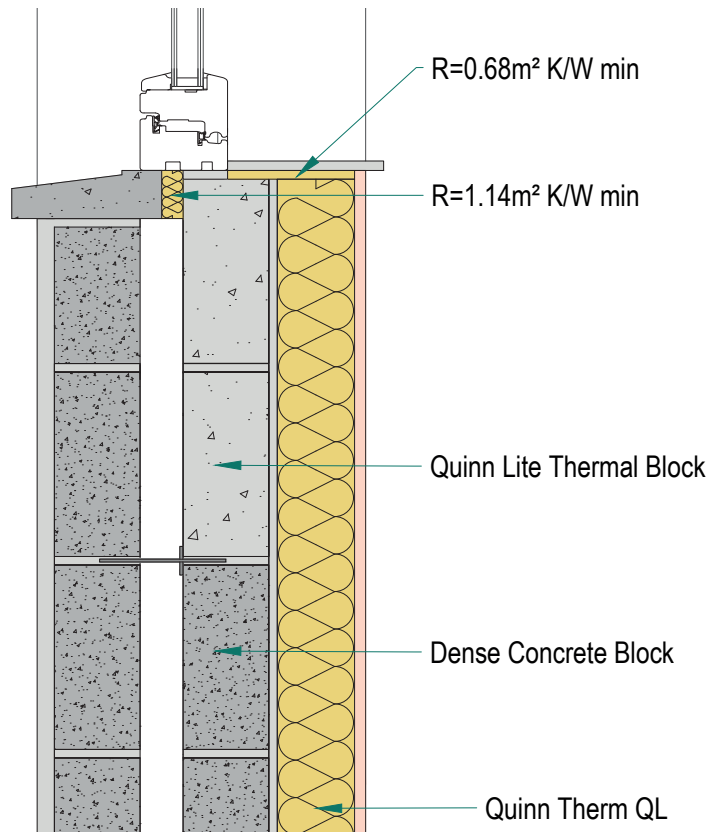

	A		B		C	
	Wall U-value 0.21W/m ² K (internal insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m ² K (internal insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m ² K Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.021	0.86	0.033	0.85	0.043	0.85
B5	0.029	0.85	0.040	0.84	0.047	0.84
B7	0.031	0.84	0.042	0.84	0.048	0.84

Notes

Insulation under cill to have an R value of 0.68 m²K/W and behind of 1.14 m²K/W

NSAI
Agrément

Andrew Lundberg
Passivate

Registration Number IAB/TM/02
NSAI Approved Thermal Modeller