

Description


Timber Frame Partition Wall through ground floor

Identifier

4.23.2

NSAI modeller no.

TM/02

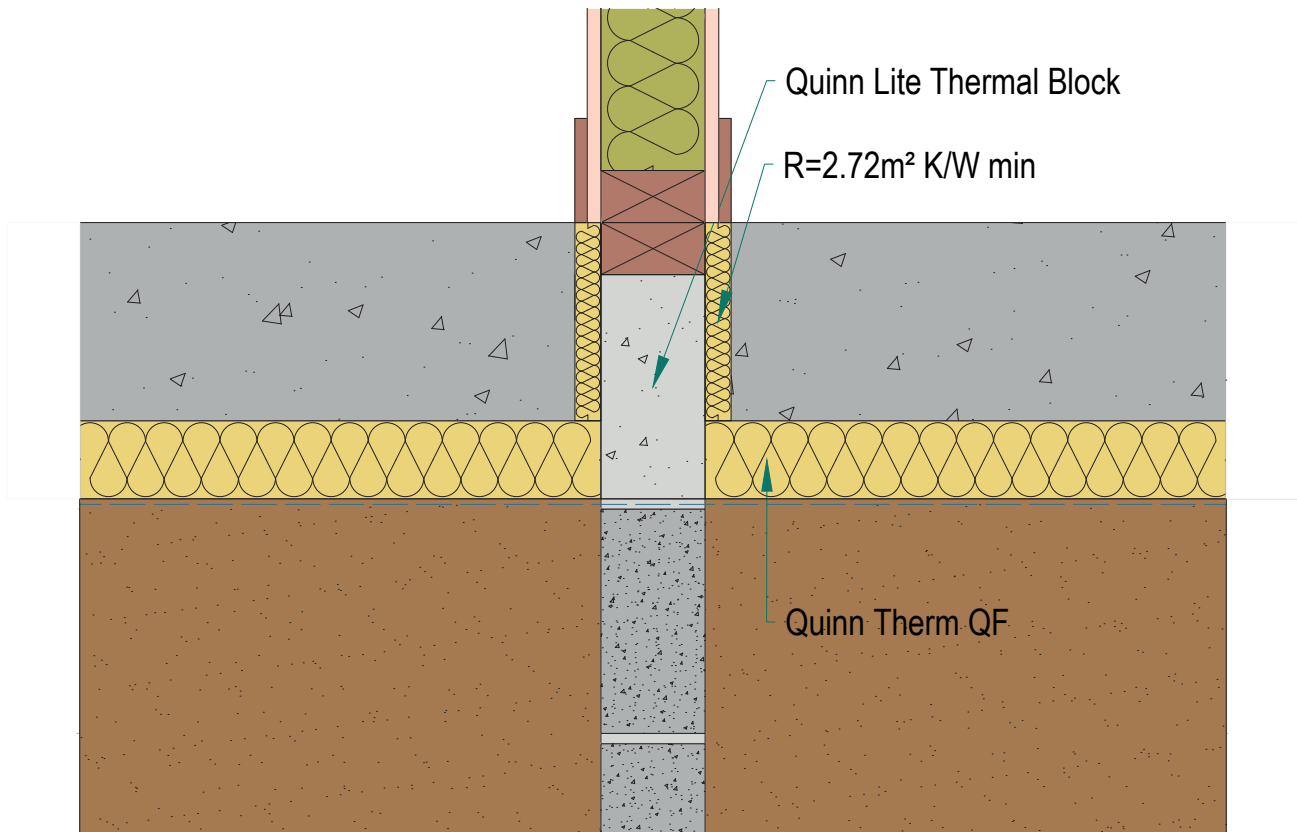

	A		B		C	
	Wall U-value 0.21W/m2K (internal insulation only) Roof = 0.16, Floor = 0.21		Wall U-value 0.15W/m2K (internal insulation only) Roof = 0.14, Floor = 0.15		Wall U-value 0.12W/m2K (internal insulation only) Roof = 0.12, Floor = 0.12	
Inner leaf type	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)	Ψ-value (W/mK)	Temperature factor (fRsi)
B3	0.016	0.95	0.018	0.95	0.039	0.95
B5	0.018	0.95	0.021	0.95	0.043	0.95
B7	0.018	0.95	0.021	0.95	0.043	0.95

Notes

Assessment carried out in accordance with TGD Part L (2011) Appendix D. This detail does not confer compliance with any other aspect of the building regulations, which should be separately assessed.



Andrew Lundberg
Passivate

Registration Number IAB/TM/02
NSAI Approved Thermal Modeller